


Push to Connect Fitting - Male Reducer Triple Branch (PKD)

Inch Tube - NPT Thread Specifications (Refer to Diagram Below)

MODEL	ΦD1	ΦD2	ΦP1	ΦP2	L	B1	B2	M1	M2	C	A	H	T	ORIFICE
PKD 3/16-5/32-N1	3/16	5/32	12.0	10	68.0	16.0	13.0	8.0	34	3.2	8	12	NPT 1/8	2.6
PKD 1/4-5/32-N1	1/4	5/32	12.0	10	68.0	16.0	13.0	8.0	34	3.2	8	12	NPT 1/8	3.2
PKD 5/16-5/32-N2	5/16	5/32	12.0	10	70.0	16.0	13.0	8.0	34	3.2	10	14	NPT 1/4	3.2
PKD 5/16-3/16-N2		3/16	14.6	10	73.0	21.2	13.0	10.5	36	3.2	10	14		4.0
PKD 5/16-1/4-N2		1/4	14.6	12	80.0	21.2	14.6	10.5	38	3.2	10	14		5.0
PKD 3/8-1/4-N3	3/8	1/4	14.6	12	81.2	21.2	14.6	10.5	38	3.2	11	17	NPT 3/8	5.0
PKD 3/8-5/16-N3		5/16	18.0	15	93.0	22.2	18.0	11.5	48	4.2	11	17		5.0

**All Whole Numbers = Millimeter (MM)

Diagram - Male Reducer Triple Branch (PKD)

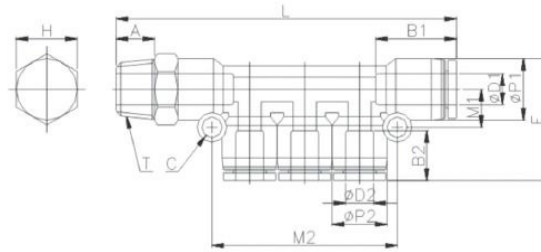

Metric Tube - BSPT Thread Specifications (Refer to Diagram Above)

MODEL	ΦD1	ΦD2	ΦP1	ΦP2	L	B1	B2	M1	M2	C	A	H	T	ORIFICE
PKD 06-04-01	6	4	12	10	68	16	13	8	34	3.2	8	12	PT 1/8	2.6
PKD 06-04-02			12	10	70	16	13	8	34	3.2	10	14	PT 1/4	3.2
PKD 08-04-02	8	6	14.6	10	73	21.2	13	10.5	36	3.2	10	14	PT 1/4	3.2
PKD 08-06-02			14.6	12	80	21.2	14.6	10.5	38	3.2	10	14	PT 1/4	4
PKD 08-06-03			14.6	12	81.2	21.2	14.6	10.5	38	3.2	11	17	PT 3/8	5
PKD 10-08-03	10	8	18	15	93	22.2	18	11.5	48	4.2	11	17	PT 3/8	5

**All Whole Numbers = Millimeter (MM)