


Push to Connect Fitting - Bulkhead Female Straight (PMF)

Inch Tube - NPT Thread Specifications (Refer to Diagram Below)

MODEL	ΦD	T	T2	L	E	A	B	H1	H2	ΦP	ORIFICE
PMF 5/32-N1	5/32	NPT 1/8	M12*1.0P	25.5	3.5	8.5	12.5	14	14	9.8	3.0
PMF 3/16-N1	3/16	NPT 1/8	M12*1.0P								4.0
PMF 3/16-N2		NPT 1/4									
PMF 1/4-N1	1/4	NPT 1/8	M14*1.0P	25.7	4	8.5	12.7	17	17	12	5.0
PMF 1/4-N2		NPT 1/4		28.3		11		17			
PMF 5/16-N1	5/16	NPT 1/8	M16*1.0P	28.4	4.5	8.5	14.4	19	19	14	6.0
PMF 5/16-N2		NPT 1/4		32		11		19			
PMF 5/16-N3		NPT 3/8		33.5		12		21			
PMF 3/8-N2	3/8	NPT 1/4	M20*1.0P	34.8	5	11	18.8	24	24	16.9	8.0
PMF 3/8-N3		NPT 3/8		35.8		12		24			
PMF 1/2-N2	1/2	NPT 1/4	M22*1.0P	35.5	5	11	19	27	27	18.8	10.0
PMF 1/2-N3		NPT 3/8		36.5		12		27			
PMF 1/2-N4		NPT 1/2		38.5		14		27			

**All Whole Numbers = Millimeter (MM)

Diagram - NPT & BSPT Tapered Thread

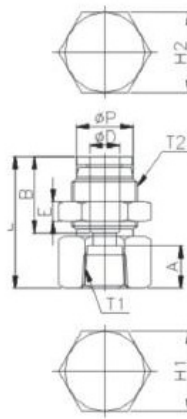

Metric Tube - BSPT Thread Specifications (Refer to Diagram Above)

MODEL	ΦD	T1	T2	L	A	B	H1	H2	ORIFICE
PMF 04-01	4	PT 1/8	M12*P1	25.5	8.5	12.5	14	14	2.5
PMF 04-02		PT 1/4		28	10		17		3.0
PMF 06-01	6	PT 1/8	M14*P1	25.7	8.5	12.7	17	17	4.5
PMF 06-02		PT 1/4		28.3	11		17		4.5
PMF 06-03		PT 3/8		29.2	12		21		4.5
PMF 08-01	8	PT 1/8	M16*P1	28.4	8.5	14.4	19	19	6.0
PMF 08-02		PT 1/4		32	11		19		6.0
PMF 08-03		PT 3/8		33.5	12		21		6.5
PMF 08-04		PT 1/2		34.8	14		24		6.5
PMF 10-01	10	PT 1/8	M20*P1	32.3	8.5	18.8	24	24	7.5
PMF 10-02		PT 1/4		34.8	11		24		8.0
PMF 10-03		PT 3/8		35.8	12		24		8.0
PMF 10-04		PT 1/2		37.8	14		24		8.0
PMF 12-02	12	PT 1/4	M22*P1	35.5	11	19	27	27	9.0
PMF 12-03		PT 3/8		36.5	12		27		10.0
PMF 12-04		PT 1/2		38.5	14		27		10.0

**All Whole Numbers = Millimeter (MM)