


Metal Push-to-Connect Fitting - Stem Adaptor (PN 38)

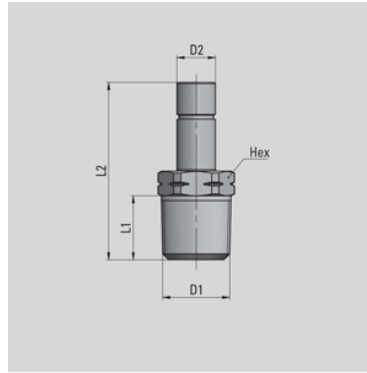

Part Number	Tube OD	D1 UNF	D1 NPTF	D2	L1	L2	HEX	OZ
PN38 5/32 10-32	10/32	5/32"	-	0.196	0.984	-	5/16"	0.088
PN38 5/32 1/8	1/8	-	5/32"	-	0.334	1.122	7/16"	0.247
PN38 5/32 1/4	1/4	-	5/32"	-	0.511	1.318	9/16"	0.494
PN38 1/4 1/8	1/8	-	1/4"	-	0.334	1.2	7/16"	0.3
PN38 1/4 1/4	1/4	-	1/4"	-	0.511	1.397	9/16"	0.529
PN38 5/16 1/8	1/8	-	5/16"	-	0.334	1.279	7/16"	0.317
PN38 5/16 1/4	1/4	-	5/16"	-	0.511	1.476	9/16"	0.547
PN38 3/8 1/4	1/4	-	3/8"	-	0.511	1.555	9/16"	0.582
PN38 3/8 3/8	3/8	-	3/8"	-	0.511	1.574	11/16"	0.811
PN38 1/2 3/8	3/8	-	1/2"	-	0.511	1.692	11/16"	0.899
PN38 1/2 1/2	1/2	-	1/2"	-	0.669	1.889	7/8"	1.517

Recommended Tightening Torque

Thread	Norm Reference	Tightening Torque (lb-ft)												
		M3x0.5	M5x0.8	M6x1	M7x1	M8x1	M10x1	M12x1.25	M12x1.5	10-32	1/8	1/4	3/8	1/2
NPTF PTFE Pre-Coated	ANSI/ASME B1.20.3	-	-	-	-	-	-	-	-	-	8.5	10.5	13.5	18.5
UNF with O-Ring	ANSI/ASME B1.1	-	-	-	-	-	-	-	-	0.59	-	-	-	-
easyThread	Universal Thread	-	-	-	-	-	-	-	-	-	0.89	1.11	1.84	2.58
Gas Parallel with O-Ring	UNI - ISO 228/1	-	-	-	-	-	-	-	-	-	0.89	1.11	1.84	2.58
Gas Taper PTFE Pre-Coated	UNI - ISO 7/1	-	-	-	-	-	-	-	-	-	1.84	2.58	4.43	8.85
Gas Parallel with Plastic Ring	UNI - ISO 228/1	-	-	-	-	-	-	-	-	-	1.48	2.21	2.95	5.9
Metric with O-Ring	ISO R/262	0.59	0.59	0.59	0.59	-	-	1.11	1.11	-	-	-	-	-