


Push to Connect Fitting - Male Y (PWT)

Inch Tube - NPT Thread Specifications (Refer to Diagram A Below)

MODEL	ΦD	T	L	E	A	B	H	ΦP	d	ORIFICE
PWT 5/32-U10	5/32	UNF 10/32	35.5	22	3.5	11.4	10	11	2.5	2.5
PWT 5/32-N1		NPT 1/8	39.3		8		10		5.5	3.0
PWT 5/32-N2		NPT 1/4	41.7		10		14		8	3.0
PWT 3/16-U10	3/16	UNF 10/32	36.5	26	3.5	11.9	3.5	13	2.5	3.0
PWT 3/16-N1		NPT 1/8	40.5		8		8		5.5	3.0
PWT 3/16-N2		NPT 1/4	42.7		10		10		8	3.0
PWT 3/16-N3		NPT 3/8	43.5		11		11		10	3.0
PWT 1/4-U10	1/4	UNF 10/32	36.5	26	3.5	11.9	3.5	13	2.5	2.5
PWT 1/4-N1		NPT 1/8	40.5		8		8		5.5	4.5
PWT 1/4-N2		NPT 1/4	42.7		10		10		8	4.5
PWT 1/4-N3		NPT 3/8	43.5		11		11		10	4.5
PWT 5/16-N1	5/16	NPT 1/8	43	30	8	12.8	8	14.5	5.5	6.0
PWT 5/16-N2		NPT 1/4	45		10		10		8	6.0
PWT 5/16-N3		NPT 3/8	46.3		11		11		10	6.0
PWT 5/16-N4		NPT 1/2	49.8		14		14		14	6.0
PWT 3/8-N1	3/8	NPT 1/8	51.5	36	8	16.2	8	18	5.5	5.0
PWT 3/8-N2		NPT 1/4	53.5		10		10		8	7.0
PWT 3/8-N3		NPT 3/8	54.5		11		11		10	7.0
PWT 3/8-N4		NPT 1/2	58		14		14		14	7.0
PWT 1/2-N2	1/2	NPT 1/4	56.5	40	10	17	10	20	8	7.0
PWT 1/2-N3		NPT 3/8	58.5		11		11		10	7.0
PWT 1/2-N4		NPT 1/2	61		14		14		14	7.0

**All Whole Numbers = Millimeter (MM)

Diagram A - NPT & BSPT Tapered Thread

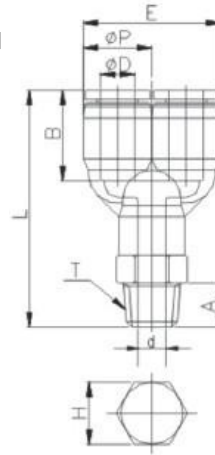

Metric Tube - BSPT Thread Specifications (Refer to Diagram A Above)

MODEL	ΦD	T	L	E	A	B	H	ΦP	d	ORIFICE
PWT 04-01	4	PT 1/8	39.3	22	8	11.4	10	11	5.5	2.5
PWT 04-02		PT 1/4	41.7		10		14		8	2.5
PWT 04-03		PT 3/8	42.9		11		17		10	2.5
PWT 04-M5		M5*P0.8	35.5		3.5		10		2.5	2.5
PWT 06-01	6	PT 1/8	40.5	26	8	11.9	12	13	5.5	2.5
PWT 06-02		PT 1/4	42.7		10		14		8	4.0
PWT 06-03		PT 3/8	43.5		11		17		10	4.0
PWT 06-04		PT 1/2	47.5		14		21			