


Metal Push-to-Connect Fitting - Swivelling with Banjo Ring (PN18)

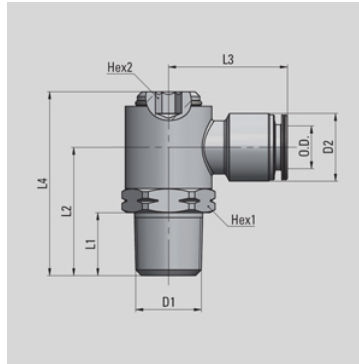

Part Number	Tube OD	D1 NPT	D2	L1	L2	L3	L4	HEX1	HEX2	OZ
PN18 5/32 1/8	5/32"	1/8	0.354	0.334	0.787	0.787	1.2	9/16"	1/8"	1.005
PN18 1/4 1/8	1/4"	1/8	0.472	0.334	0.787	0.885	1.2	9/16"	1/8"	1.058
PN18 1/4 1/4		1/4	0.472	0.511	1.023	0.925	1.476	11/16"	3/16"	1.728
PN18 5/16 1/8	5/16"	1/8	0.551	0.334	0.787	0.885	1.2	9/16"	1/8"	1.076
PN18 5/16 1/4		1/4	0.551	0.511	1.023	0.944	1.476	11/16"	3/16"	1.746
PN18 5/16 3/8		3/8	0.551	0.511	1.102	1.023	1.614	13/16"	1/4"	-
PN18 3/8 1/4	3/8"	1/4	0.629	0.511	1.023	1.023	1.476	11/16"	3/16"	1.834
PN18 3/8 3/8		3/8	0.629	0.511	1.102	1.102	1.614	13/16"	1/4"	2.963

Recommended Tightening Torque

Thread	Norm Reference	Tightening Torque (lb-ft)													
		M3x0.5	M5x0.8	M6x1	M7x1	M8x1	M10x1	M12x1.25	M12x1.5	10-32	1/8	1/4	3/8	1/2	
NPTF PTFE Pre-Coated	ANSI/ASME B1.20.3	-	-	-	-	-	-	-	-	-	-	8.5	10.5	13.5	18.5
UNF with O-Ring	ANSI/ASME B1.1	-	-	-	-	-	-	-	-	-	0.59	-	-	-	-
easyThread	Universal Thread	-	-	-	-	-	-	-	-	-	-	0.89	1.11	1.84	2.58
Gas Parallel with O-Ring	UNI - ISO 228/1	-	-	-	-	-	-	-	-	-	-	0.89	1.11	1.84	2.58
Gas Taper PTFE Pre-Coated	UNI - ISO 7/1	-	-	-	-	-	-	-	-	-	-	1.84	2.58	4.43	8.85
Gas Parallel with Plastic Ring	UNI - ISO 228/1	-	-	-	-	-	-	-	-	-	-	1.48	2.21	2.95	5.9
Metric with O-Ring	ISO R/262	0.59	0.59	0.59	0.59	-	-	1.11	1.11	-	-	-	-	-	-